

# Cloud Series

LED Poster Display


**LED**igital  
Your Local  
LED  
Application

## APPLICATIONS

Hotel lobby, shopping mall, store, bank hall.



## SUPER SLIM AND LIGHTWEIGHT DESIGN

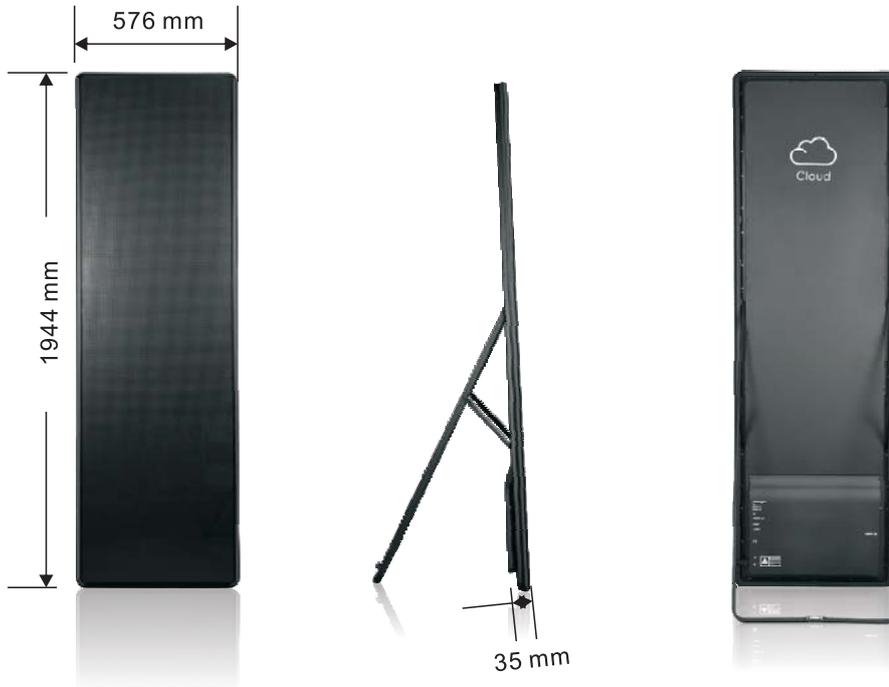

Slim and elegant design, with thickness 35mm, weight only 38kg, easy to set up and install anywhere you like

## PLUG AND PLAY



User friendly interface, easy to edit and send content to the display



## FRAME COLOR



Default black, Can customize the following seven kinds of color.



- Ferrari red
- Fashion brown
- Champaign gold
- Jewelry blue
- Noble purple
- Elegant silver
- Agate green

## FRONT SERVICEABLE





Only takes 5 seconds to replace a module for maintenance, saving the precious time

## SYNCHRONOUS AND ASYNCHRONOUS CONTROL SYSTEM



### A / One machine control mode

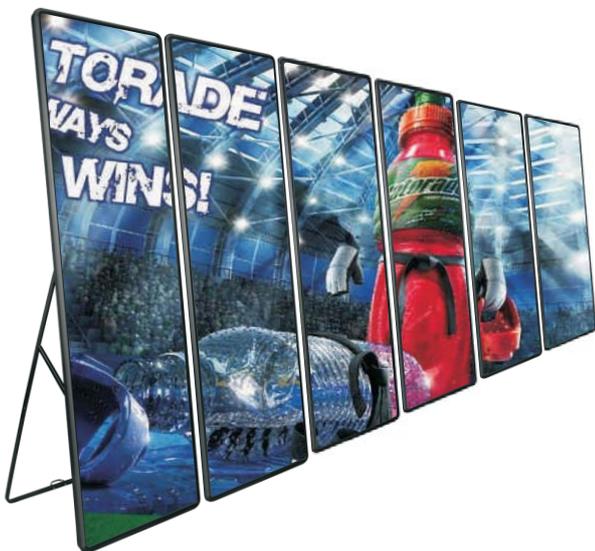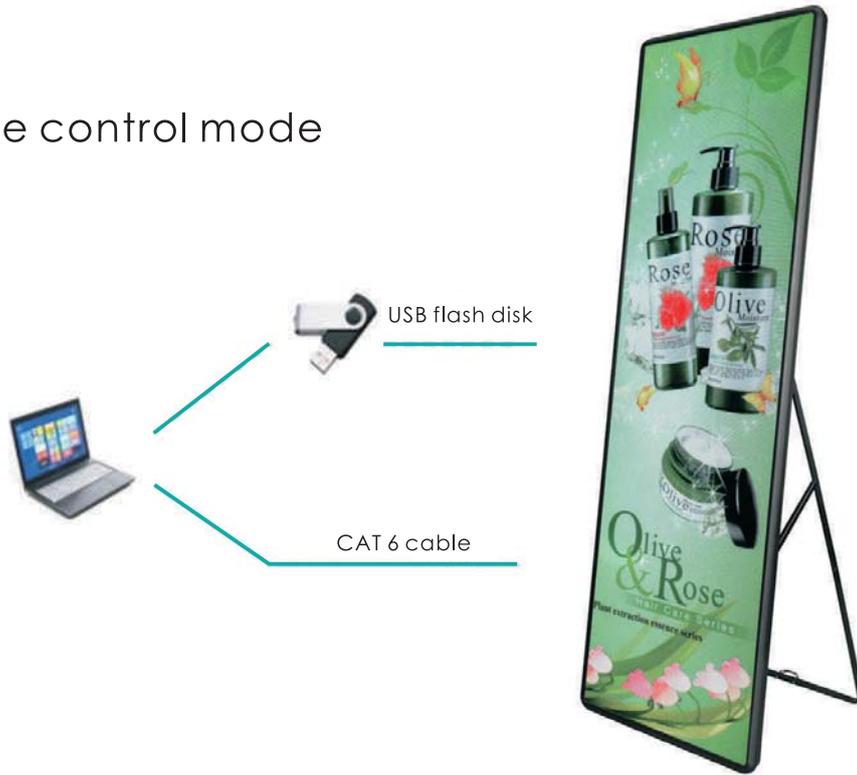

### B / Multi-motor synchronous control mode

In synchronous mode, you can connect the screens by the HDMI cable, by connecting six units of screens you can display a complete picture.

## SMART MANAGEMENT



Easily upload content via WIFI, USB or HDMI, and manage hundreds of displays with one device from anywhere

## PARAMETERS

Value	C18i	C25i
Pixel pitch	1.8	2.571
Brightness	1000	1200
Pixel configuration	SMD	SMD
Colours	281 trillion	281 trillion
Refresh rate	≥3000	≥3000
Pixel matrix per panel	320X1080	224X756
Pixel matrix per sq.m	308641	151284
Viewing angle ( H/V)	140/140 deg.	140/140 deg.
Power consumption (max/avg)	800/280 (max/avg)	600/210 (max/avg)
IP rate	IP40/IP20	IP40/IP20
Input voltage (AC)	110/240	110/240
Panel size(L x W x H)	576X1944X35	576X1944X35
Panel weight	38kgs	38kgs