

N Series

Indoor Fixed Installation LED Display

LEDDigital


Your Local
LED
Application

LIGHT WEIGHT AND SLIM DESIGN




Thickness 80mm, weight 13kg

ELEGANT CABINET DESIGN

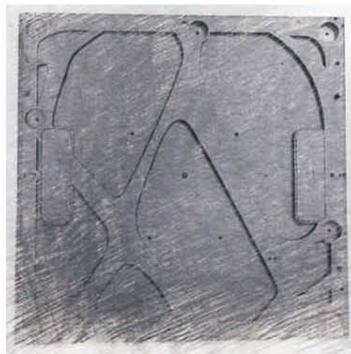

STUNNING VIEWING PERFORMANCE

HD




Low grey scale level,
poor viewing performance



N series, high grey scale
and consistent color display

More than 1920Hz refresh rate ;
65536 levels gray scale and 281 trillion colours.

FRONT SERVICEABLE

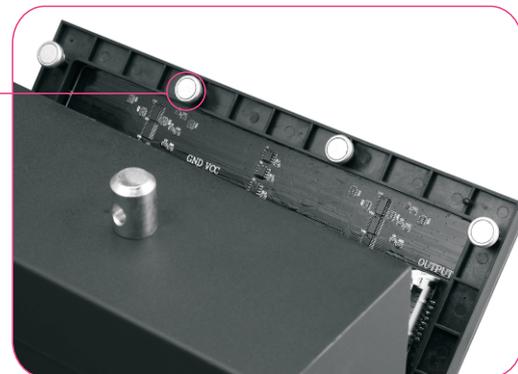

Magnetic module, make
the installation and service
fast and easy

MISTAKE TRACKING SYSTEM



Visible mistake tracking function.



QUICK SET UP



N series use exterior connection port, allow user to set up each cabinet in 3 seconds.


COLOR CUSTOMIZATION



- Black
- Elegant silver
- Space grey
- Bone beige
- Golden

Pick your favorite color and design as you like

0 DISTANCE, WALL MOUNT INSTALLATION

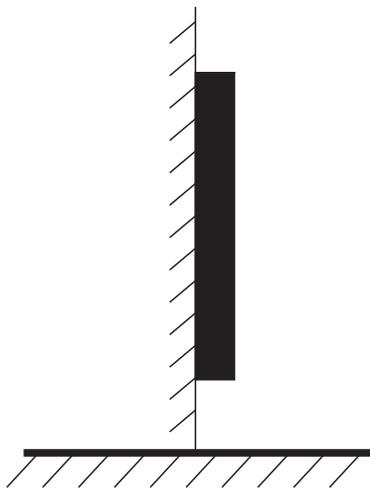

Only 0cm distance from wall when wall-mount installation

PARAMETERS

Value	N4i	N5i	N6i	N8i
Pixel pitch	4.17mm	5.21mm	6.25mm	8.33mm
Brightness	1000nits	1500nits	1500nits	1500nits
Pixel configuration	SMD	SMD	SMD	SMD
Colours	281 trillion	281 trillion	281 trillion	281 trillion
Refresh rate	≥1920	≥1440	≥1440	≥1440
Pixel matrix per panel	120X240	96X192	80X160	60X120
Pixel matrix per sq.m	57600	36864	25600	14400
Viewing angle (H/V)	140/140 deg.	140/140 deg.	140/140 deg.	140/140 deg.
Power consumption (max/avg)	710/240 W/sq.m	650/220 W/sq.m	650/220 W/sq.m	600/210 W/sq.m
IP rate	IP40/IP20	IP40/IP20	IP40/IP20	IP40/IP20
Input voltage (AC)	110/240	110/240	110/240	110/240
Panel size(L x W x H)	500X1000X80mm	500X1000X80mm	500X1000X80mm	500X1000X80mm
Panel weight(Alu.)	13kgs	13kgs	13kgs	13kgs

Applications

Temporary stage, TV studio, nightclub& bar, theater, school, conference room, hotel, shopping mall, events, etc.

