


# Glass series

Transparent Screen

## Features

- ▶ Ultralight design
- ▶ Super silent
- ▶ High-transparent
- ▶ Extremely convenient
- ▶ Ultra-energy-saving
- ▶ Aluminum frame design

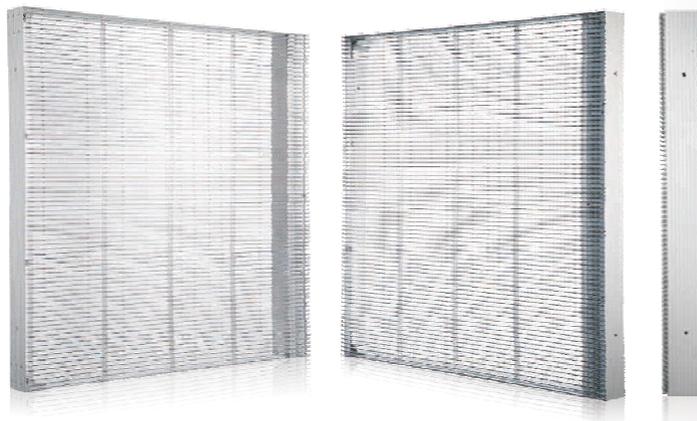

## Parameters

Value	Glass7	Glass10	Glass12	Glass15
Pixel pitch(mm)	7.81	10	12.5	15.63
Brightness(nits)	3200	3200	3200	3200
Pixel configuration	SMD	SMD	SMD	SMD
Colours	281 trillion	281 trillion	281 trillion	281 trillion
Refresh rate(Hz)	≥1920	≥1920	≥1920	≥1920
Pixel matrix per panel	128X128	100X100	80X80	64X64
Pixel matrix per sq.m	16384	10000	6400	4096
Viewing angle (H/V)	140/140 deg.	140/140 deg.	140/140 deg.	140/140 deg.
Power consumption (W/sq.m)	400/140(max/avg)	400/140(max/avg)	400/140(max/avg)	400/140(max/avg)
IP rate	IP40/IP20	IP40/IP20	IP40/IP20	IP40/IP20
Input voltage (VAC)	110/240	110/240	110/240	110/240
Panel size(L x H x W mm)	1000X1000X98	1000X1000X98	1000X1000X98	1000X1000X98
Panel weight(kgs)	15(Steel.)	15(Steel.)	13(Steel.)	12(Steel.)

\*Specification subjected to change without prior notice.

## Applications



Shopping mall



Airport



Exhibition



Building

## Show Case

