


Micro *Customize yours* series

Flexible LED Screen

Features

- ▶ High flexibility
- ▶ Solid structure
- ▶ Adjustable brightness
- ▶ Ultra wide angle of view
- ▶ Easy maintenance
- ▶ Standardization
- ▶ Energy saving

SOFT MODULE

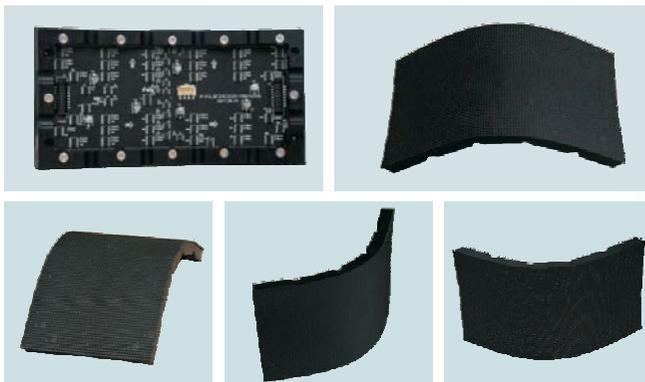

Parameters

Value	Micro25	Micro40	Micro50
Pixel pitch (mm)	2.5	4	5
Brightness(nits)	>500	>1000	>800
Pixel configuration	SMD	SMD	SMD
Colours	281 trillion	281 trillion	281 trillion
Refresh rate(Hz)	>1920	>1920	>1920
Pixel matrix per panel	96X48	64X32	64X32
Pixel matrix per sq.m	160000	62500	40000
Viewing angle (H/V)	140/140 deg.	140/140 deg.	140/140 deg.
Power consumption (w/sq.m)	24	20	20
IP rate	IP40/IP20	IP40/IP20	IP40/IP20
Input voltage (DC)	DC4.5-5.5V	DC4.5-5.5V	DC4.5-5.5V
Module size(L x W x H mm)	240X120X13.4	256X128X13.4	320X160X13.4

*Specification subjected to change without prior notice.

Applications



Shopping mall



Airport



Exhibition



Bar

Show Case

